
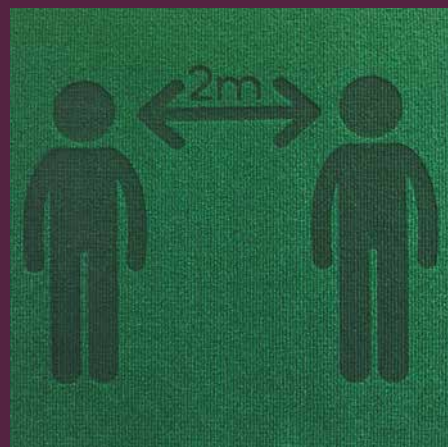
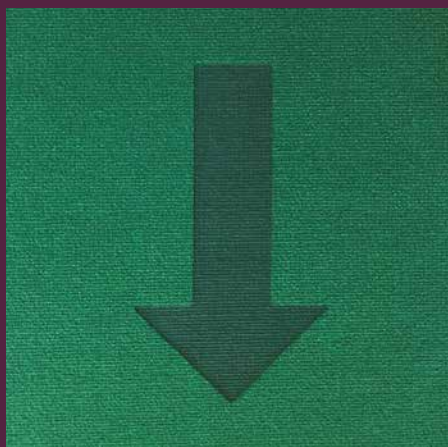
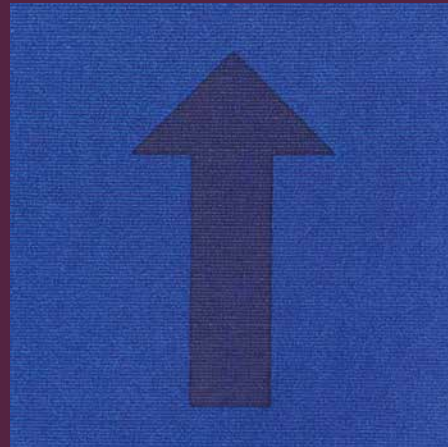
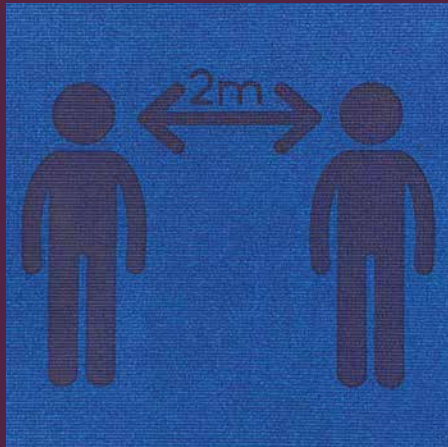
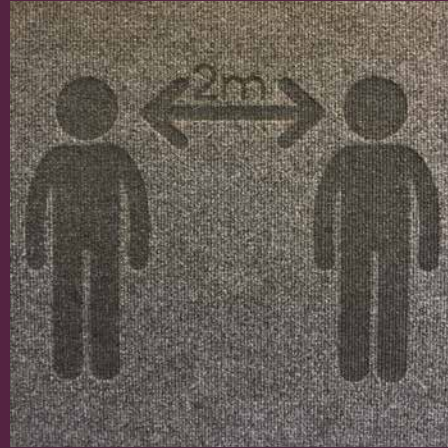


H

HECKMONDWIKE

MANUFACTURERS OF FIBRE BONDED CARPETS

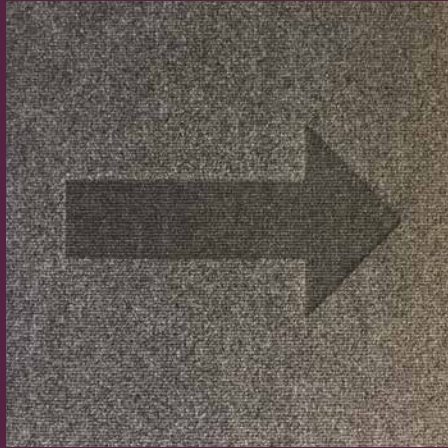

SOCIAL DISTANCING TILES




Specialist Range

SOCIAL DISTANCING TILES


Heckmondwike's market-leading Supacord carpet tiles range has been transformed to emphasise safe social distancing in schools, colleges, universities and other learning environments.

The Social Distancing Tiles allow education and commercial sites to interchange regular carpet tiles with ease, providing the perfect solution to deliver 2-metre guidance or walkway indicators.

- Perfect for schools, colleges and universities alongside other commercial buildings, such as offices
- Uses Heckmondwike's renowned Supacord range
- Class-leading performance as standard
- Standard 50cm x 50cm tiles for simple retrofit
- Easy to set at 2-metre distances
- Can be used anywhere throughout a building
- Decreases risk of slips, trips and falls when compared to social distancing loose lay mats
- Bright colour range to increase awareness

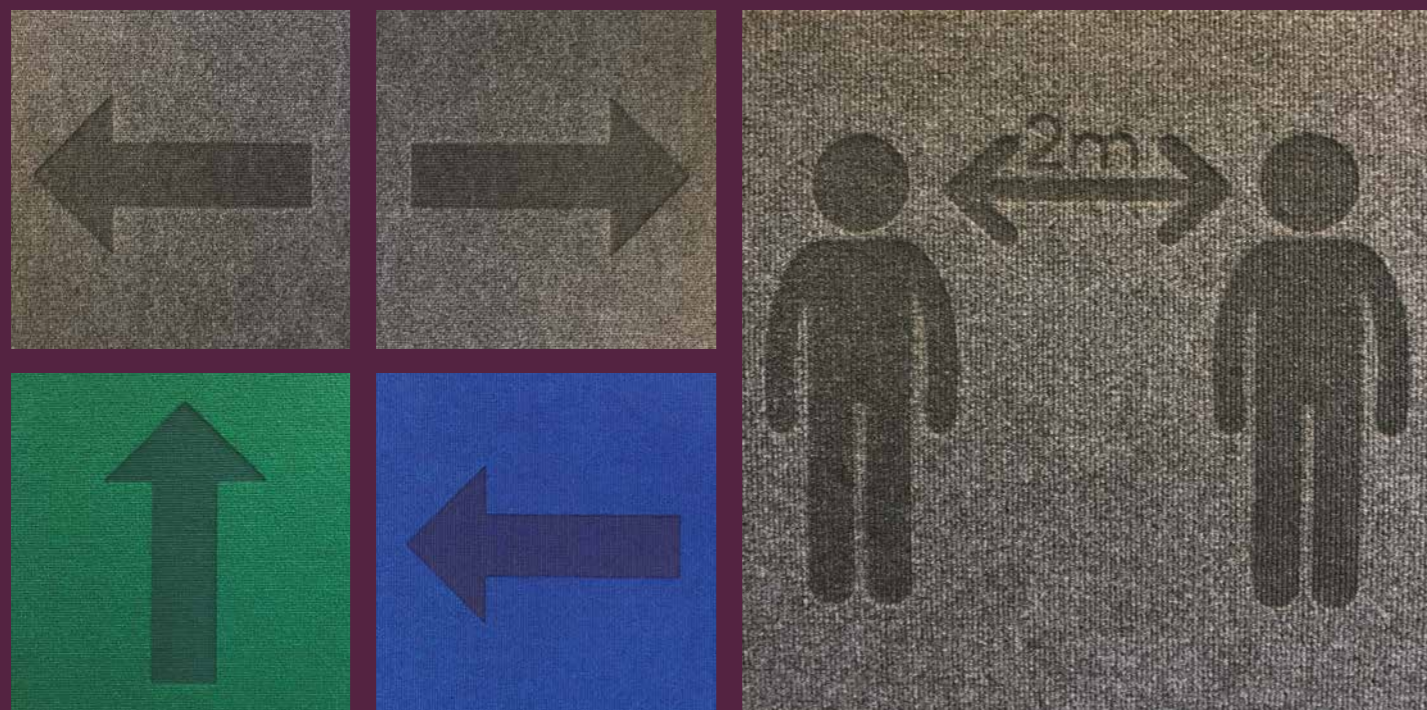


STANDARD COLOURS AVAILABLE:

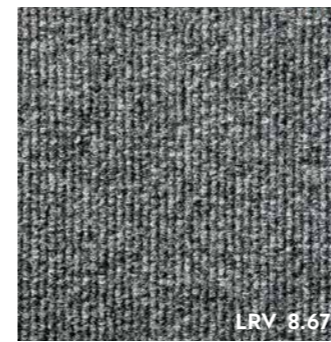

STEEL GREY



BLUE

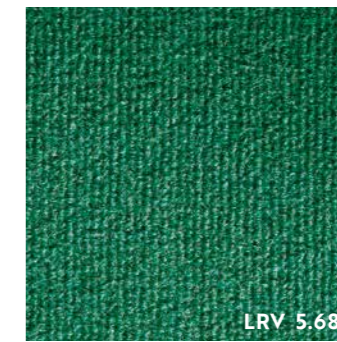

GREEN

No minimum order

SUPACORD'S REMAINING 39 COLOURS ARE AVAILABLE ON SPECIAL REQUEST:



Minimum order of 40 tiles (2 boxes / 10m²)

H
HECKMONDWIKE
MANUFACTURERS OF FIBRE BONDED CARPETS

Heckmondwike

A division of National Floorcoverings Ltd.
Wellington Mills, Liversedge,
West Yorkshire WF15 7FH

sales@heckmondwike-fb.co.uk

Admin: **01924 410544**
Sales Office: **01924 406161**
Free Fax: **0800 136769**

www.heckmondwike-fb.co.uk

Specification

PRODUCT	Supacord Heavy Contract Carpet Tiles
FIBRE CONSTRUCTION	80% Polypropylene, 15% Nylon, 5% Recycled Polyester
WEIGHT	4020gsm
THICKNESS	7.60mm
TILE SIZE 	50cm x 50cm (Tiles are Bitumen backed)
COLOUR FASTNESS	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:B01) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5
FLAMMABILITY	(BS5287) Assessment and labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1 (Tile)
REDUCTION IN IMPACT NOISE	BS EN ISO 140-8:19dB
ANTISTATIC	Suitable for use in computer rooms
INSTALLATION	The method of installation should conform to BS5325. For details of subfloor preparation and a full guide to installation visit: www.heckmondwike-fb.co.uk . Before laying Supacord, tiles should be allowed to condition for 24 hours at the expected temperature and humidity levels.
ADHESIVE GUIDE	F. Ball F41 Tackifier or Bostik Laybond Carpet Tile Tackifier
MAINTENANCE	To achieve maximum life expectancy it is essential to initiate a maintenance schedule from the date of installation. A full guide to cleaning & maintenance is available at: www.heckmondwike-fb.co.uk

PLEASE NOTE: For technical reasons, as with all textile materials, it is not possible to colour match from different batches. Orders that need to colour match should be placed at the same time. Production may, therefore, show variations to the sample card. Fibre compositions of colours within ranges may vary. Heckmondwike reserves the right to change or modify product specifications without giving prior notice.

